

PŘEROVSKÉ KOTLÁRNY VLČEK s.r.o.

Essential part of our production consist on extensive assortment of equipment and spare parts for assembly, repair, reconstruction of boilers and pressure parts, such as membrane walls, chambers, superheaters, economizers, bent pipes and other pressure parts for all various types of boilers.

We manufacture boiler accessories such as: flue gas pipes, air channels, iron platforms, scoria crushers, fire grates, conveyers, storing reservoirs, water softeners, coal feeders, silencers of burners, steel constructions etc.

The company is manufacturer and supplier of products for energetic and heating units. Design, construction, manufacturing and assembling enable to ensure complex performance of work.

The company applies quality management system ČSN EN ISO 9001 and system control of welding processes ČSN EN ISO 3834-2, of the process for performing steel constructions ČSN EN 1090-2+A1 and holds necessary authorizations and certificates issued by ITI Prague, ITI TÜV, ČKAIT, DOM-ZO 13.



Kojetínská 728, 751 52 Přerov
Czech Republic
Tel.: +420 581 201 395
Fax: +420 581 201 398
e-mail: info@kotelarna.cz
<http://www.kotelarna.cz>



**Holzindustrie Chánovice
Czech Republic
Biomass fire-grate boiler**

Parameters of the boiler:
 Rated steam output 18 t/hod
 Rated steam pressure 42 bar
 Steam temperature 480 °C



Production facilities

Machine of the membrane wall



Plasma cutting machine



Welding under flux



Tube bending machine



Sheet metal bending machine



Turning machines





ООО КИНЕФ КИРИШИ

Russia



Flue gas boiler

Parameters of the boiler:

Rated steam output 2x18 t/hod

Rated steam pressure 1,58 MPa

Steam temperature 300 °C

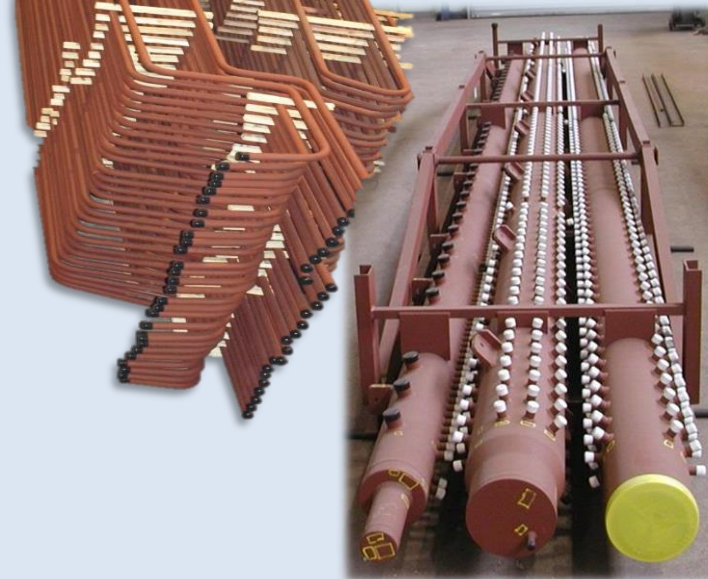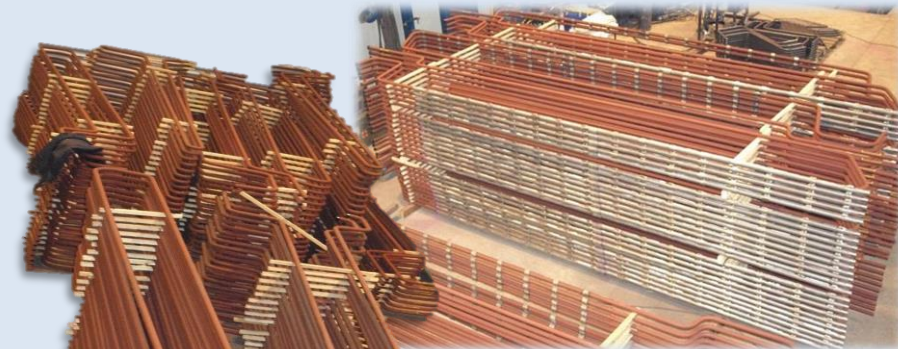

Kafr El Dawar

EGYPT

Gas boiler

Parameters of the boiler:


Rated steam output 385 t/hod

Rated steam pressure 139 bar

Steam temperature 530 °C

material of headers 15 128,
13CrMo4-5


material of tubes P91, 16Mo3

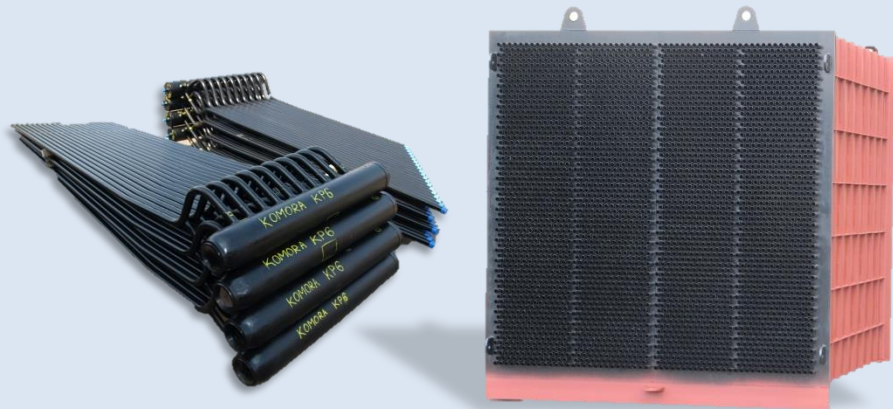

Gudang Garam Indonesia Biomass fluid boiler

Parameters of the boiler:

Rated steam output	25 t/hod
Rated steam pressure	20 bar
Steam temperature	215 °C

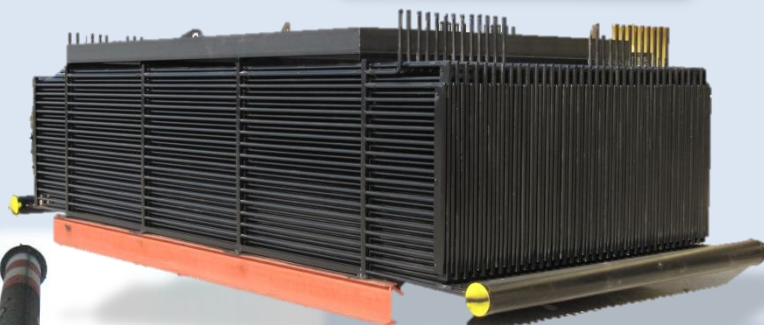


Teplárna Otrokovice Czech Republic Cole boiler

Parameters of the boiler:

Rated steam output	125 t/hod
Rated steam pressure	9,32MPa
Steam temperature	540 °C



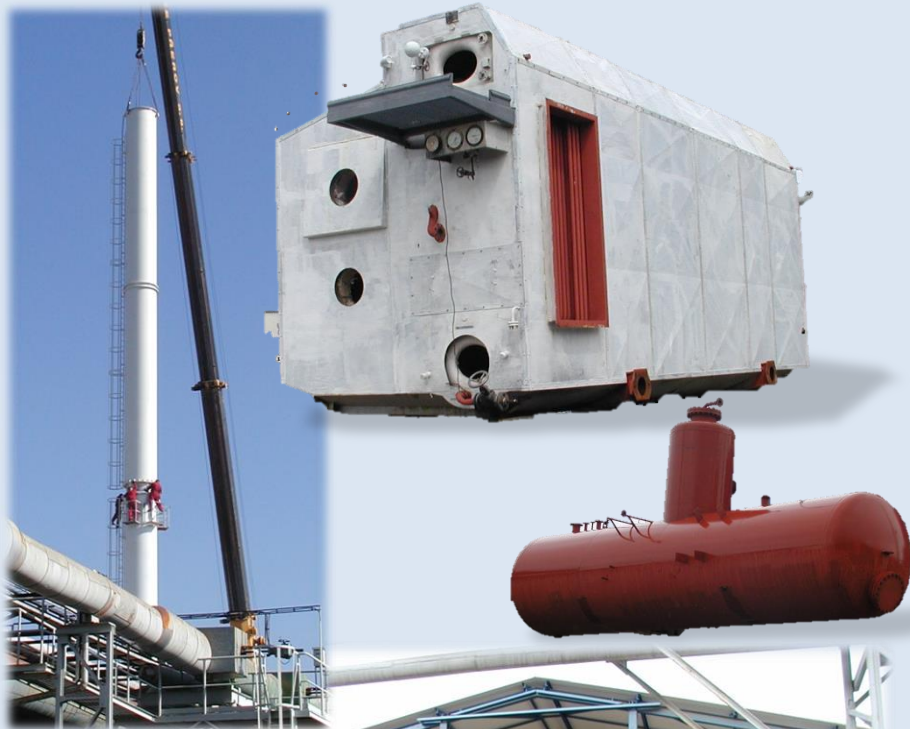

Teplárna Přerov
Czech Republic
Steam boiler



Parameters of the boiler:
 Rated steam output 2x25 t/hod
 Rated steam pressure 9 bar
 Steam temperature 250 °C



Chekka Sugar Refinery S.A.L.
Lebanon
Heavy oil boiler

Parameters of the boiler:
 Rated steam output 2x12,5 t/hod
 Rated steam pressure 30 bar
 Steam temperature 400 °C



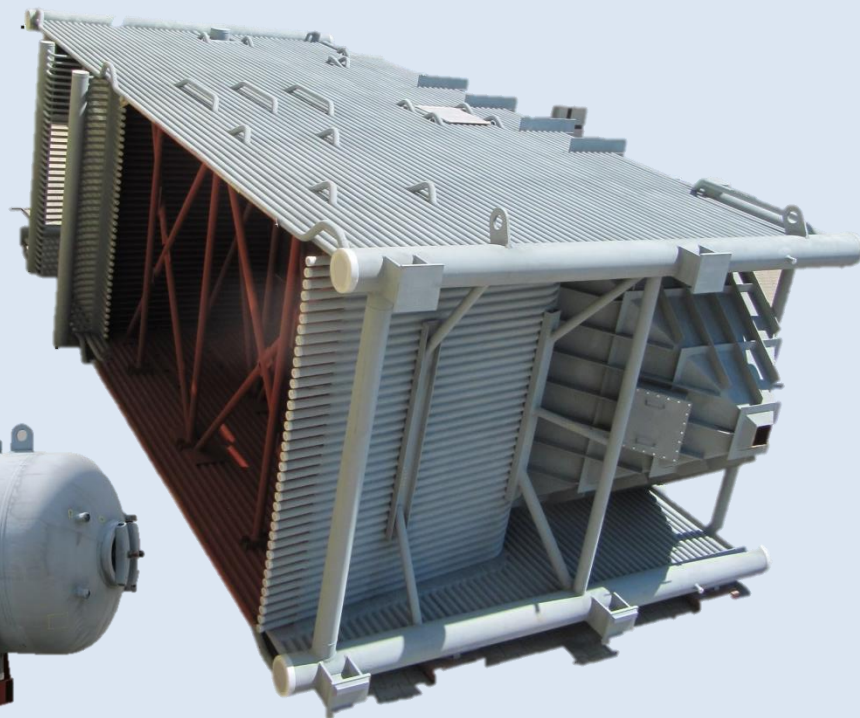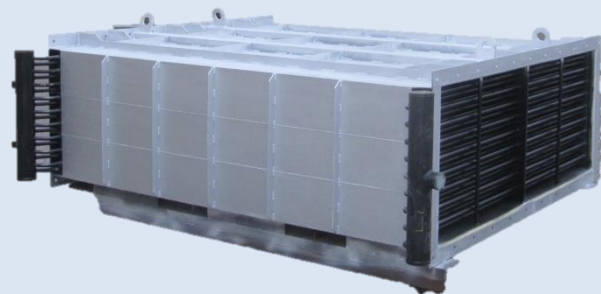

DEZA a.s. Valašské Meziříčí
Czech Republic
Steam boiler

Parameters of the boiler:

Rated steam output 30 t/hod

Rated steam pressure 70 bar

Steam temperature 520 °C

